


LILLY


LED Downlight (3 CCT)
Art. no.: JP-6111



Light technic

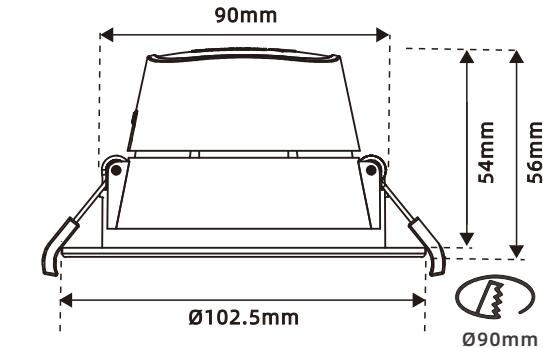

Light source:	LED
Wattage:	9W
Luminous flux:	775lm @2700K 910lm @3000K 830lm @4000K
Efficacy:	90lm/W
Colour rendering (CRI):	80Ra
MacAdam factor:	SDCM<3
Lifetime:	L70/B10>100,000h
Beam angle:	100°



Dimming

Type:	Trailing edge/Leading edge
-------	----------------------------

Protection

Luminaire class:	Class II
Ingress protection:	Luminaire IP44 / Control gear IP20

Material and finish

Housing:	Stamping Aluminum
Colour:	White (RAL 9003) / Black (RAL 9005)
Optics:	Milky diffuser

Highly efficient luminaire with timeless design, suitable for most applications.

Flexible through optional light control and various beam angles.

Designed for recessed ceiling mount, with recommended roof thickness 2-25 mm.
Stable mounting springs.
Cutout size: Ø 90 mm.

Toolless junction box with connection terminal block:
3x2.5 mm (Leading-/Trailing Edge Dimmers)

Front cover and outer ring of stamping aluminum.

Diffuser made of high precision injection using milky plastic.
Light distribution Extra wide radiant.

Standard color White (RAL 9003) Black (RAL 9005).

Insulation-proof Luminaire that can be installed directly against insulation material.

Installation

Mounting:	Recessed
Cable entry:	Toolless terminal block

Dimensions

Height:	56mm
Diameter:	102.5mm
Cut-out:	90mm
Ceiling void depth:	54mm

