



Luminans



FROM
STOCKHOLM

SINCE 2010

Luminans Group AB
Runstensvägen 5,
175 61 Järfälla, Sweden

Luminans (HK)
Unit A7, 12/F, Astroia Building,
34 Ashley Rd, Kowloon, HK

Luminans/Lumelectric (SZ)
3F, Block 703, Pengji Industrial
Park, Luohu Dist, Shenzhen, China

Luminans (DG)
3/4F, Changrong High-tech Park,
Hu-men Town, Dongguan, China



STRIVE FOR
A BETTER FUTURE



OEM/ODM Manufacturer

Luminans is a team of passionate and highly devoted coworkers offering to notch lighting&control technologies for all lighting needs. To ensure our position in the market, we always deliver cutting edge technology and carrying out research and development, developing the latest products in the field.

We have many years of accumulated experience and an abundance of satisfied clients and we have been recognized in various high-class hotels, commercial office buildings, shopping malls and parking areas. As a global company we take our responsibility to help decreasing the carbon footprint and by that protect our planets eco system, all of the material we use is in conformity with RoHS.

Our goal is to combine our experience with your ideas to create comfortable light atmospheres and esthetical pleasing designs. Luminans will help you all the way from the drawing board to the final lighting solution and beyond.

We have a professional and strict QC team. With the strict Quality System Management, which contains SQA (Supplier Quality Assurance), IQC (Incoming Quality Check), PQC (Process Quality Check), FQC (Final Quality Check) & CSI (Customer Service Improvement), From raw materials to production, from production to factory inspection, every process is strictly in accordance with the quality management system of ISO 9001 ,and we got all the necessary certificates for relevant market.



ISO 9001 by Intertek



Philips Premium Partner for LED module and converter

More than 70 patents includes both appearance and utility



Tests done by Intertek



Tests done by TUV



Tests with RED for Smart Lighting

CB test with our own developed drivers



Nemko test for ISOSAFE





Goniophotometer



Aging Room



Aging Line



UV Accelerated Weathering Tester



Spectroradiometer



SMT Line



IP Rating Test



Corrosion Resistant Testing



EMC Tester




DIY
Markets
Sell like hot cakes

Any style
Professional customers
Tail your solution



Projects
Professional
One-station service

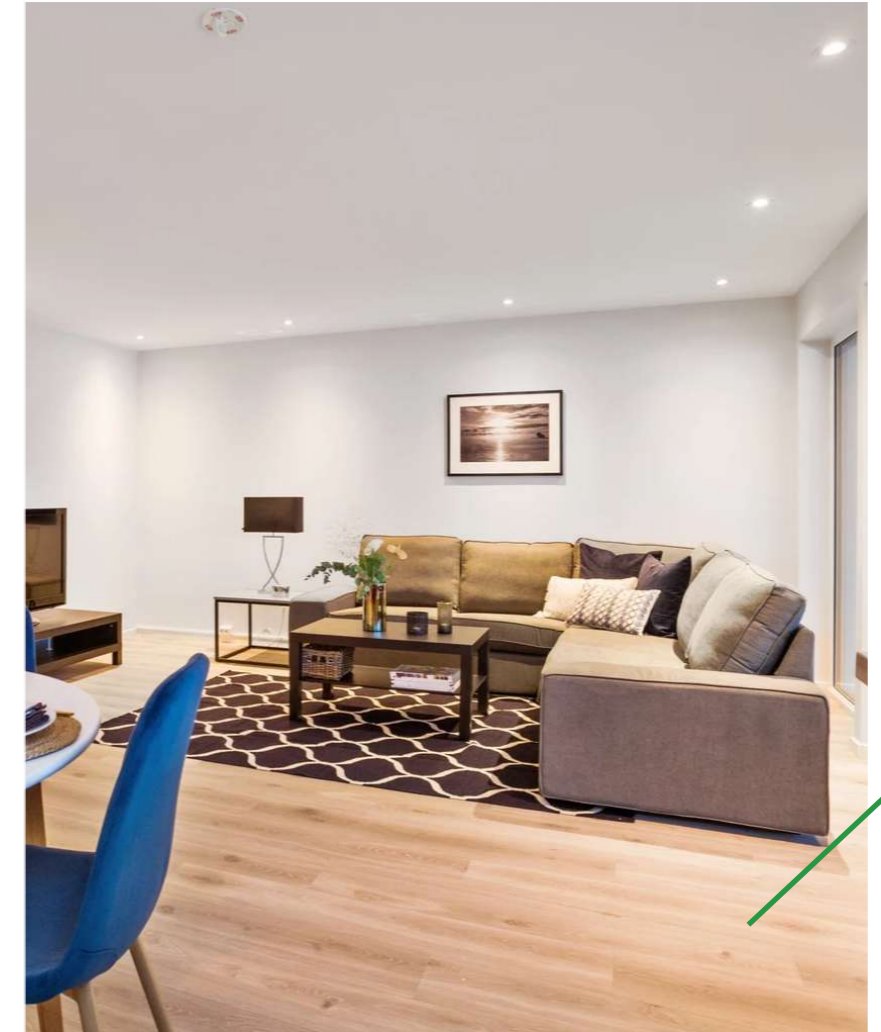



ASTRID P.10

CHESTER P.11

DOT P.12

LOVE P.13



KEVIN P.14

AURORA P.15

JOY P.16

LEVI P.17



NEO P.18

LEON P.19



KEVIN DOLD P.20

LEON SQUARE P.21



LILLY P.22

LILLY2 P.23

CYLLI P.24

DL P.25



CORE P.26

STREAM P.27

MIMI P.28

GISELA P.31

TENOR P.33



KVEQ 3x3 P.35

KVEQ 6x6 P.36

KVEQ 3x12 P.37




SPOT P.41

GARDEN P.43

ASTRID

LED Downlight IP54 ISOSAFE DOWNLIGHT

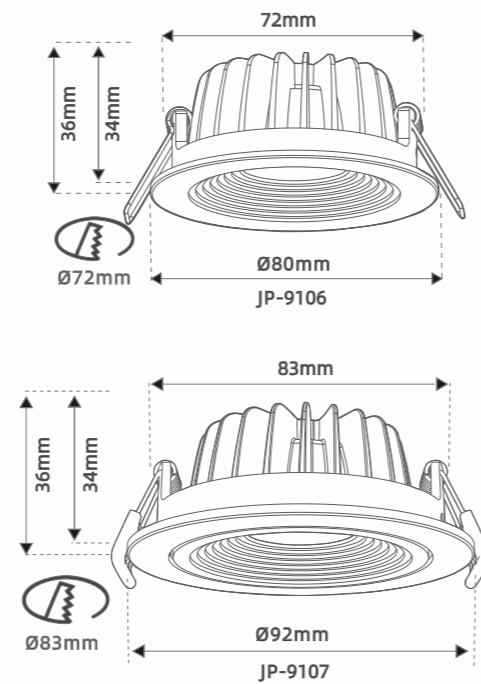

Certification Mark			
Test Regulation	CE-LVD	ISOSAFE	IP54
Report Reference	CN21XKRD	339134	CN21WNJ3
Test Lab			


	36°	Compatible With
		E.mergency
		Em0403 LiFePO4 4W 3 hours
		C.ontrl
		LUM-D0918TF Triac Dimmable
		LUM-15DA Dali 2 Dimmable
		Triac Dimmer
		Zigbee Dimmer



Art.no.	Description	Wattage	CCT	Lumens	B/A	Cutout
JP-9106	Astrid Fix White 827	9W	2700K	720lm	36°	72mm
JP-9106	Astrid Fix White 830	9W	3000K	750lm	36°	72mm
JP-9107	Astrid White 827	9W	2700K	720lm	36°	83mm
JP-9107	Astrid White 830	9W	3000K	750lm	36°	83mm

LED Downlight IP54 ISOSAFE DOWNLIGHT

CHESTER

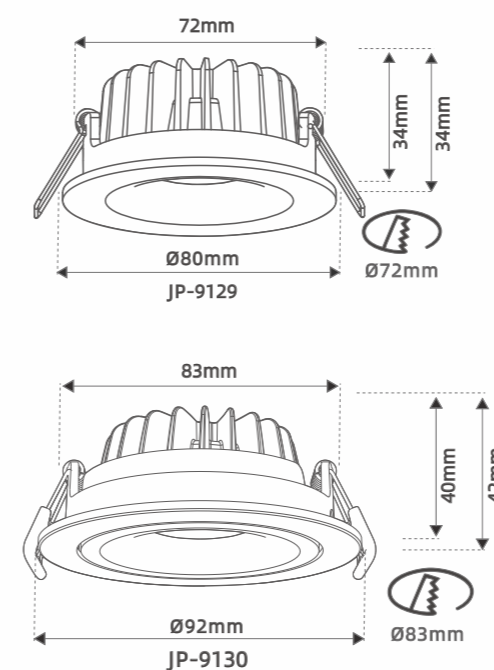

Compatible With	36°	
E.mergency		
	Em0403 LiFePO4 4W 3 hours	
C.ontrl		
	LUM-D0918TF Triac Dimmable	
	LUM-15DA Dali 2 Dimmable	
	Triac Dimmer	
	Zigbee Dimmer	



Certification Mark			
Test Regulation	CE-LVD	ISOSAFE	IP54
Report Reference	CN21XKRD	339134	CN21WNJ3
Test Lab			




Art.no.	Description	Wattage	CCT	Lumens	B/A	Cutout
JP-9129	Chester Fix White 827	9W	2700K	720lm	36°	72mm
JP-9129	Chester Fix White 830	9W	3000K	750lm	36°	72mm
JP-9130	Chester White 827	9W	2700K	720lm	36°	83mm
JP-9130	Chester White 830	9W	3000K	750lm	36°	83mm

DOT

LED Downlight IP44 ISOSAFE DOWNLIGHT

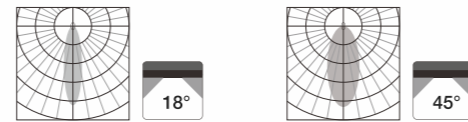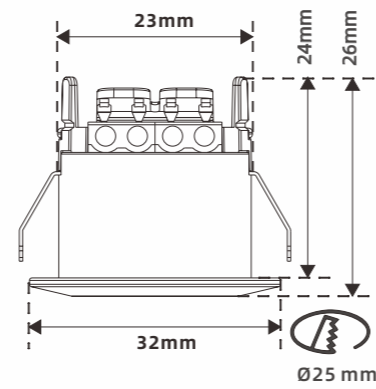

Serial connection from spot to spot, fast extension in a smart way


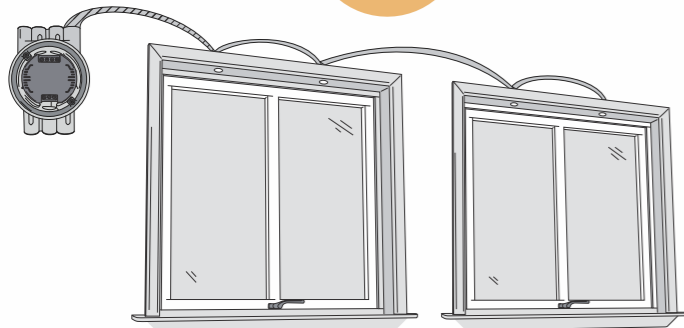


Art.no.	Description	Wattage	CCT	Lumens	B/A	Cutout
JP-9501	Dot step White 827	1W	2700K	60lm	18°/45°	25mm
JP-9501	Dot step White 830	1W	3000K	70lm	18°/45°	25mm
JP-9505	Dot White 827	1W	2700K	60lm	18°/45°	25mm
JP-9505	Dot White 830	1W	3000K	70lm	18°/45°	25mm



LED Downlight IP44 ISOSAFE DOWNLIGHT

LOVE

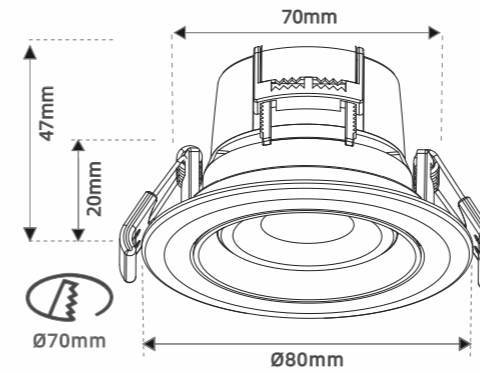



Triac Dimmable Driver Built-in



Art.no.	Description	Wattage	CCT	Lumens	B/A	Cutout
JP-9005	Love 930	5.5W	3000K	410lm	60°	70mm

KEVIN

LED Downlight IP54 ISOSAFE DOWNLIGHT

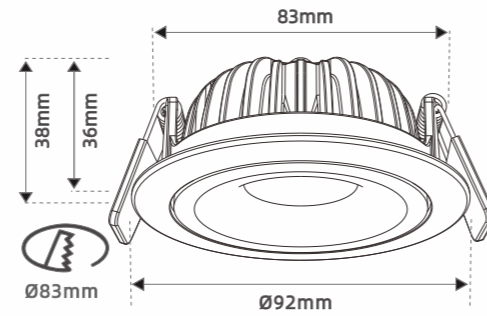

Compatible With

E.mergency

Em0403 LiFePO4 4W 3 hours



C.ontrl

LUM-D1226TF Triac Dimmable



LUM-15DA Dali 2 Dimmable



Triac Dimmer
Zigbee Dimmer



Certification Mark



Test Regulation

CE-LVD

ISOSAFE

IP54

Report Reference

CN21XKRD

339134

CN21WNJ3



Test Lab



Art.no.	Description	Wattage	CCT	Lumens	B/A	Cutout
JP-9110-08	Kevin White 930	8W	3000K	800lm	40°	83mm
JP-9110-12	Kevin White 930	12W	3000K	1100lm	40°	83mm
JP-9112CD-09	Cecilia Dim2Warm	9W	1800-3000K	690lm	40°	83mm
JP-9112CD-12	Cecilia Dim2Warm	12W	1800-3000K	950lm	40°	83mm

LED Downlight IP54 ISOSAFE DOWNLIGHT

AURORA

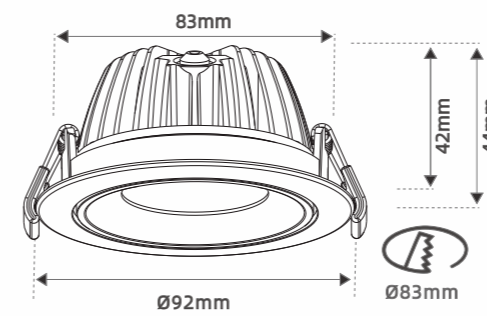

Compatible With

E.mergency

Em0403 LiFePO4 4W 3 hours



C.ontrl

LUM-D0918TF Triac Dimmable



LUM-15DA Dali 2 Dimmable



Triac Dimmer
Zigbee Dimmer



Certification Mark



Test Regulation

CE-LVD

ISOSAFE

IP54

Report Reference

CN21XKRD



339134

CN21WNJ3

Test Lab



Art.no.	Description	Wattage	CCT	Lumens	B/A	Cutout
JP-9120-08	Aurora White 930	8W	3000K	800lm	40°	83mm
JP-9120-12	Aurora White 930	12W	3000K	1100lm	40°	83mm
JP-9120CD-09	Aurora Dim2Warm	9W	2200-3000K	690lm	40°	83mm
JP-9120CD-12	Aurora Dim2Warm	12W	2200-3000K	950lm	40°	83mm


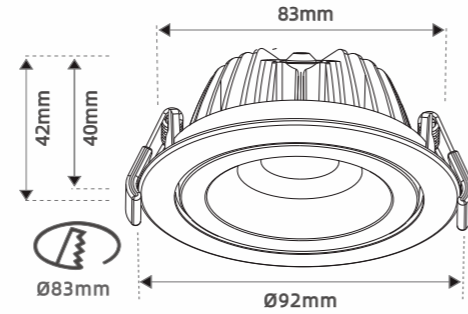


Certification Mark			
Test Regulation	CE-LVD	ISOSAFE	IP54
Report Reference	CN21XKRD	339134	CN21WNJ3
Test Lab			
5 year Warranty	UV Resistant	IK10 Protection	IP54 Protection
	Flame Resistant	Isosafe	

Compatible With	
E.mergency	
Em0403 LiFePO4 4W 3 hours	
C.ontrl	
LUM-D1226TF Triac Dimmable	
LUM-15DA Dali 2 Dimmable	
Triac Dimmer	
Zigbee Dimmer	



Art.no.	Description	Wattage	CCT	Lumens	B/A	Cutout
JP-9123-08	Joy White 930	8W	3000K	720lm	60°	83mm
JP-9123-12	Joy White 930	12W	3000K	1000lm	60°	83mm
JP-9123CD-09	Joy Dim2Warm	9W	2200-3000K	690lm	60°	83mm
JP-9123CD-12	Joy Dim2Warm	12W	2200-3000K	950lm	60°	83mm

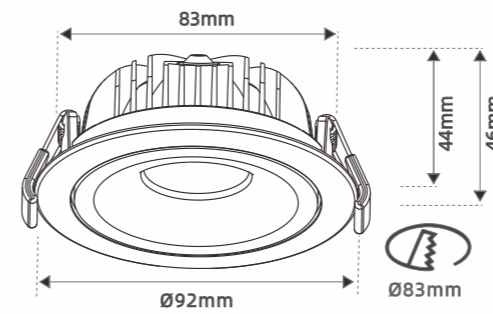

Certification Mark			
Test Regulation	CE-LVD	ISOSAFE	IP54
Report Reference	CN21XKRD	339134	CN21WNJ3
Test Lab			
5 year Warranty	UV Resistant	IK10 Protection	IP54 Protection
	Flame Resistant	Isosafe	



Compatible With	
E.mergency	
Em0403 LiFePO4 4W 3 hours	
C.ontrl	
LUM-D0918TF Triac Dimmable	
LUM-15DA Dali 2 Dimmable	
Triac Dimmer	
Zigbee Dimmer	



Art.no.	Description	Wattage	CCT	Lumens	B/A	Cutout
JP-9125-08	Levi White 930	8W	3000K	800lm	40°	83mm
JP-9125-12	Levi White 930	12W	3000K	1100lm	40°	83mm
JP-9125CD-09	Levi Dim2Warm	9W	2200-3000K	690lm	40°	83mm
JP-9125CD-12	Levi Dim2Warm	12W	2200-3000K	850lm	40°	83mm

NEO

LED Downlight IP54 ISOSAFE DOWNLIGHT

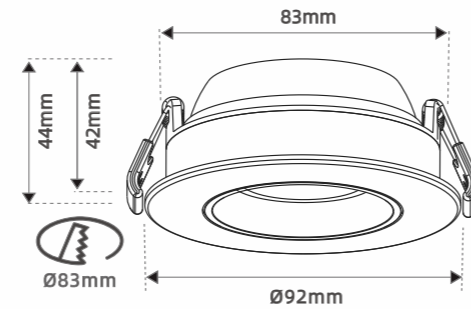

Compatible With

- E.mergency
- Em0403 LiFePO4 4W 3 hours
- C.ontrl
- LUM-D0918TF Triac Dimmable
- LUM-15DA Dali 2 Dimmable
- Triac Dimmer
- Zigbee Dimmer



Certification Mark			
Test Regulation	CE-LVD	ISOSAFE	IP54
Report Reference	CN21XKRD	339134	CN21WNJ3
Test Lab			



Art.no.	Description	Wattage	CCT	Lumens	B/A	Cutout
JP-9126-08	Neo White 930	8W	3000K	720lm	40°	83mm
JP-9126-12	Neo White 930	12W	3000K	1000lm	40°	83mm
JP-9126CD-09	Neo Dim2Warm	9W	2200-3000K	630lm	40°	83mm
JP-9126CD-08	Neo ActiveDim	8W	1800-4000K	650lm	40°	83mm

LED Downlight IP54 ISOSAFE DOWNLIGHT

LEON

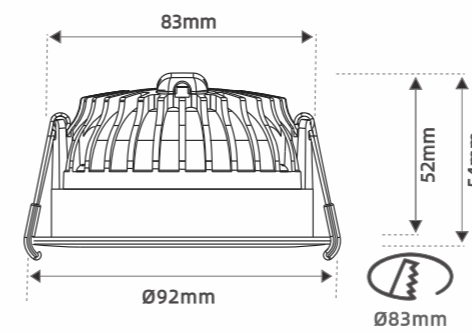

Compatible With

- E.mergency
- Em0403 LiFePO4 4W 3 hours
- C.ontrl
- LUM-D0918TF Triac Dimmable
- LUM-15DA Dali 2 Dimmable
- Triac Dimmer
- Zigbee Dimmer



Certification Mark			
Test Regulation	CE-LVD	ISOSAFE	IP54
Report Reference	CN21XKRD	339134	CN21WNJ3
Test Lab			



Art.no.	Description	Wattage	CCT	Lumens	B/A	Cutout
JP-9127-08	Leon White 930	8W	3000K	800lm	40°	83mm
JP-9127-12	Leon White 930	12W	3000K	1100lm	40°	83mm
JP-9127CD-09	Leon Dim2Warm	9W	2200-3000K	690lm	40°	83mm
JP-9127CD-12	Leon Dim2Warm	12W	2200-3000K	950lm	40°	83mm

KEVIN DOLD

LED Downlight
IP54 ISOSAFE DOWNLIGHT

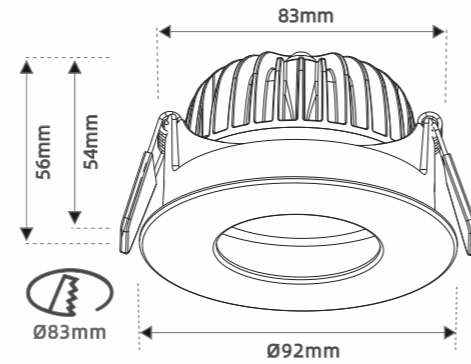

36°

Compatible With

- E.mergency**
- Em0403 LiFePO4 4W 3 hours
- C.ontr ol**
- LUM-D1226TF Triac Dimmable
- LUM-15DA Dali 2 Dimmable
- Triac Dimmer
- Zigbee Dimmer




Certification Mark	CE	ISOSAFE	IP54
Test Regulation	CE-LVD	ISOSAFE	IP54
Report Reference	CN21XKRD	339134	CN21WNJ3
Test Lab	TÜV Rheinland	Nemko	TÜV Rheinland
5 year Warranty	UV Resistant	IK10 Protection	IP54 Protection
Flame Resistant	Isosafe		



Art.no.	Description	Wattage	CCT	Lumens	B/A	Cutout
JP-9118-08	Kevin Dold White 930	8W	3000K	610lm	36°	83mm
JP-9118-12	Kevin Dold White 930	12W	3000K	800lm	36°	83mm
JP-9118CD-09	Kevin Dold Dim2Warm	9W	2200-3000K	610lm	36°	83mm
JP-9118CD-12	Kevin Dold Dim2Warm	12W	2200-3000K	800lm	36°	83mm

LED Downlight
IP54 ISOSAFE DOWNLIGHT

LEON SQUARE

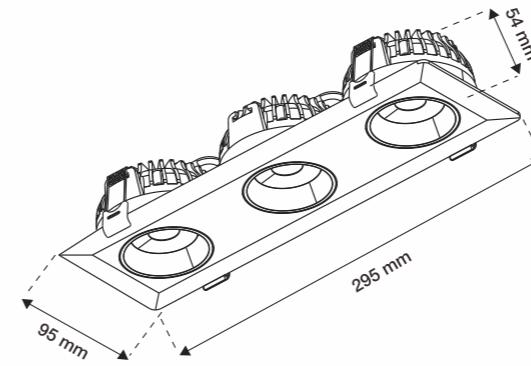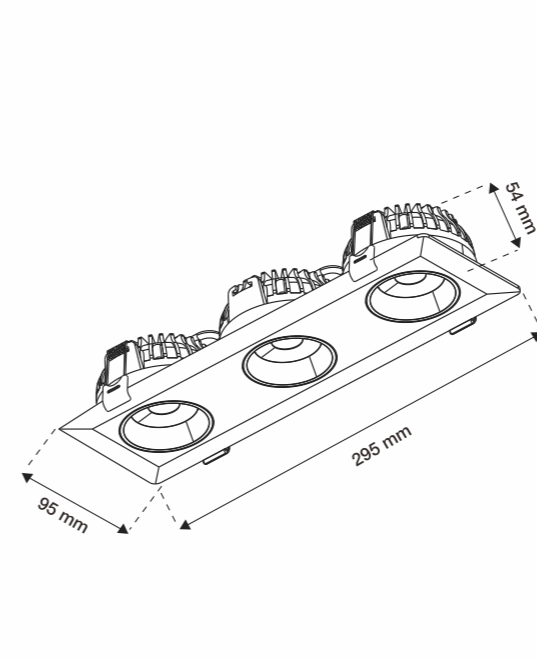

40°



Compatible With

- E.mergency**
- Em0403 LiFePO4 4W 3 hours
- C.ontr ol**
- LUM-D0918TF Triac Dimmable
- LUM-15DA Dali 2 Dimmable
- Triac Dimmer
- Zigbee Dimmer

Certification Mark	CE	ISOSAFE	IP54
Test Regulation	CE-LVD	ISOSAFE	IP54
Report Reference	CN21XKRD	339134	CN21WNJ3
Test Lab	intertek	Nemko	intertek
5 year Warranty	UV Resistant	IK10 Protection	IP54 Protection
Flame Resistant	Isosafe		



Art.no.	Description	Wattage	CCT	Lumens	B/A	Cutout
JP-9142-08	Leon Square	8W	3000K	800lm	40°	83x83mm
JP-9142-08	Leon Square Duo	8W x 2	3000K	1600lm	40°	180x83mm
JP-9142-08	Leon Square TRI	8W x 3	3000K	2400lm	40°	280x83mm


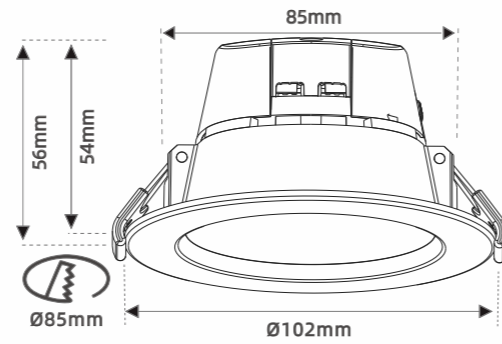


Triac Dimmable Driver On Back

Certification Mark			
Test Regulation	CE-LVD	ISOSAFE	IP44
Report Reference	211022004S	375862	211022006S
Test Lab			Luminsna Self-test



Art.no.	Description	Wattage	CCT	Lumens	B/A	Cutout
JP-6111	Lilly	9W	2700/3000/4000K	750/870/810lm	100°	83-90mm
JP-6111	Lilly	9W	3000/4200/5700K	780/890/830lm	100°	83-90mm
JP-6111CD	Lilly Dim2Warm	9W	2200-3000K	780lm	100°	83-90mm


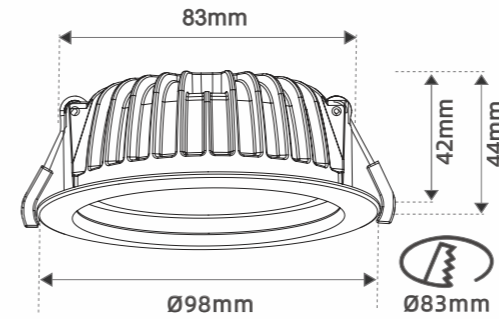


Compatible With		
E.mergency		Em0403 LiFePO4 4W 3 hours
Control		LUM-D0918TF Triac Dimmable
		LUM-15DA Dali 2 Dimmable
		Triac Dimmer Zigbee Dimmer

Certification Mark			
Test Regulation	CE-LVD	ISOSAFE	IP54
Report Reference	CN21XKRD	339134	CN21WNJ3
Test Lab			



Art.no.	Description	Wattage	CCT	Lumens	B/A	Cutout
JP-6112-10	Lilly 2	10W	2700/3000/4000K	710/810/730lm	90°	83-90mm
JP-6112-10	Lilly 2	10W	3000/4200/5700K	730/830/750lm	90°	83-90mm

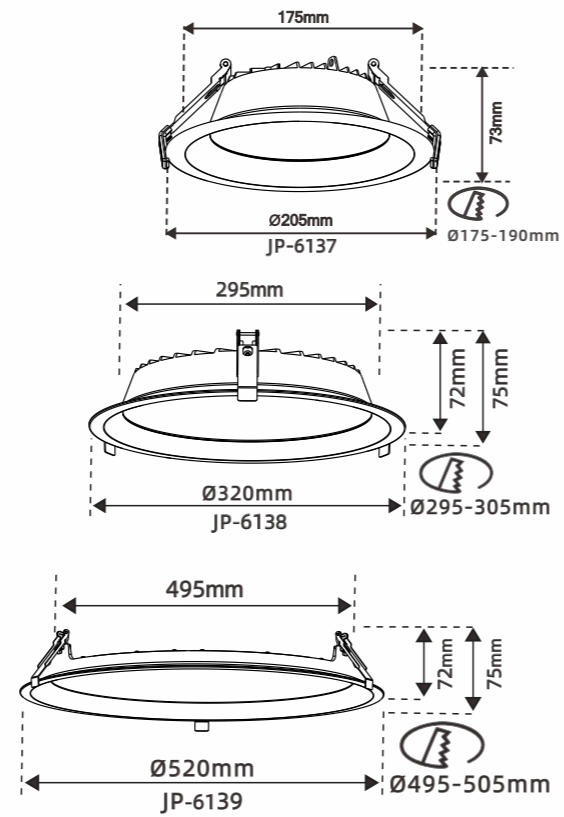



Compatible With

- Em0403 LiFePO4 4W 3 hours
- LUM-D30H & LUM-D40H Non Dimmable
- LUM-28DA & LUM-40DA Dali 2 Dimmable
- Triac Dimmer Zigbee Dimmer

Certification Mark	CE	ISOSAFE	IP44
Test Regulation	CE-LVD	ISOSAFE	IP44
Report Reference	210819011S	210819012S	210819013S
Test Lab	Luminans Self-test	Luminans Self-test	Luminans Self-test
5 year Warranty	UV Resistant	IK10 Protection	IP44 Protection
Flame Resistant	Isosafe		



Art.no.	Description	Wattage	CCT	Lumens	B/A	Cutout
JP-6137	CYLLI 200	11/18/25W	3/4/5K	1400/2500/3300lm	110°	175-190mm
JP-6138	CYLLI 300	11/18/25W	3/4/5K	1400/2500/3300lm	110°	295-305mm
JP-6139	CYLLI 300	22/32/41W	3/4/5K	2600/3550/4430lm	110°	495-505mm

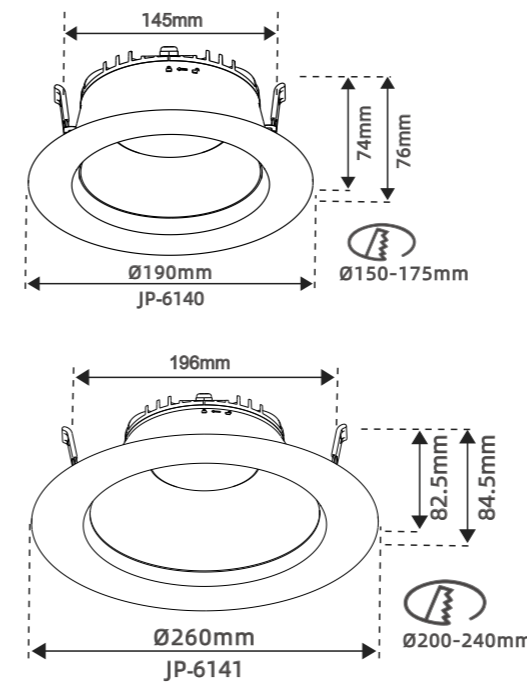

Compatible With

- Em0403 LiFePO4 4W 3 hours
- LUM-D2560TF Triac Dimmable
- LUM-D2867DA Dali 2
- Triac Dimmer Zigbee Dimmer


Certification Mark	CE	ISOSAFE	IP54
Test Regulation	CE-LVD	ISOSAFE	IP54
Report Reference	CN21XKRD	339134	CN21WNJ3
Test Lab	TUV Rheinland	Nemko	TUV Rheinland
5 year Warranty	UV Resistant	IK10 Protection	IP54 Protection
Flame Resistant	Isosafe		





Art.no.	Description	Wattage	CCT	Lumens	B/A	Cutout
LUM-6140	DL150	10/18/24W	3/4/5K	1400/2300/2850lm	110°	150-175mm
LUM-6141	DL210	10/18/24W	3/4/5K	1400/2300/2850lm	110°	200-240mm

CORE

LED Track Light

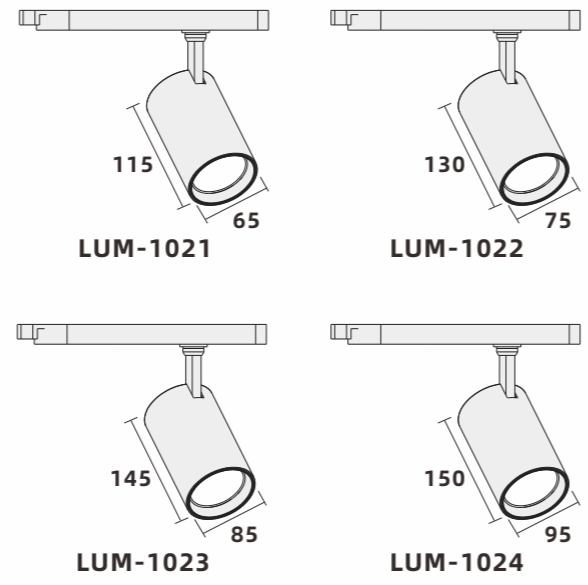


Available track types

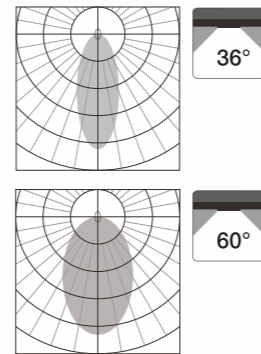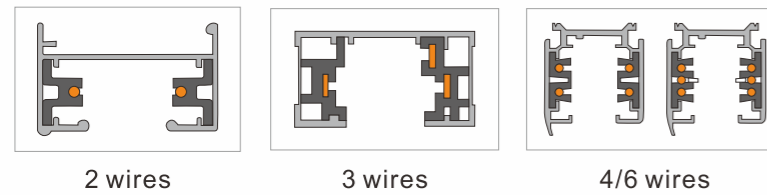



Art.no.	Description	Wattage	CCT	Lumens	B/A	Dimming
LUM-1021	Core S	15W	3000K	1350lm	36°/60°	On/off, Triac, Dali
LUM-1022	Core M	22W	3000K	2000lm	36°/60°	On/off, Triac, Dali
LUM-1023	Core L	32W	3000K	2850lm	36°/60°	On/off, Triac, Dali
LUM-1024	Core XL	43W	3000K	3850lm	36°/60°	On/off, Triac, Dali

LED Track Light


STREAM

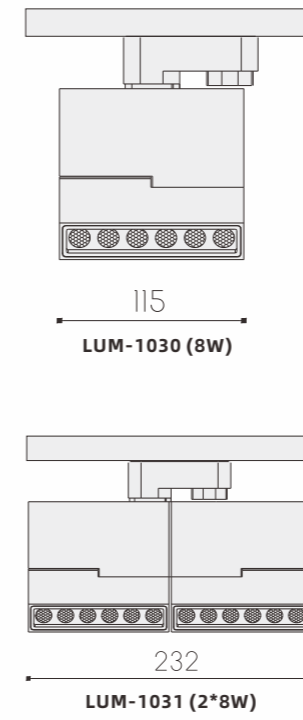


Available track types

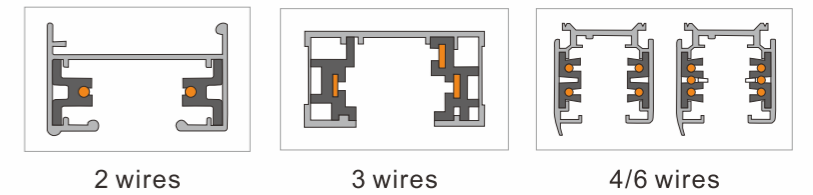


Art.no.	Description	Wattage	CCT	Lumens	B/A	Dimming
LUM-1030	Stream	8W	3000K	610lm	36°	On/off, Triac
LUM-1031	Stream Duo	2*8W	3000K	630lm	36°	On/off, Triac

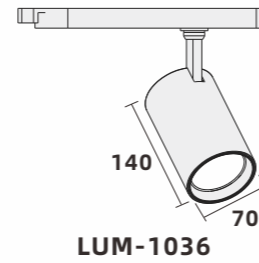


Available track types




2 wires



3 wires



4/6 wires

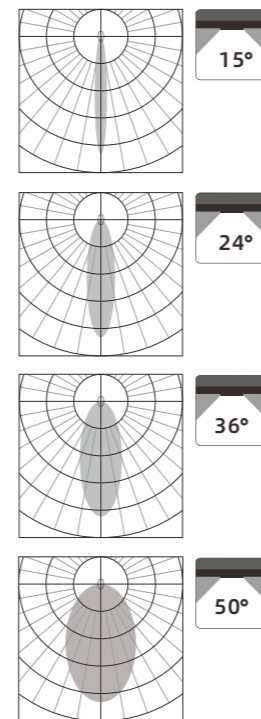


Art.no.	Description	Wattage	CCT	Lumens	B/A	Dimming
LUM-1036	Mimi White 930	10/18W	3000K	1300/2090lm	15°/24°/36°/50°	Triac, Dali
LUM-1036	Mimi Black 930	10/18W	3000K	1300/2090lm	15°/24°/36°/50°	Triac, Dali






LED Wall Light





GISELA

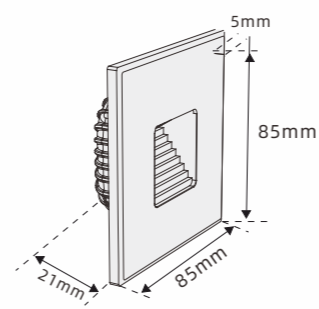

JP-9020

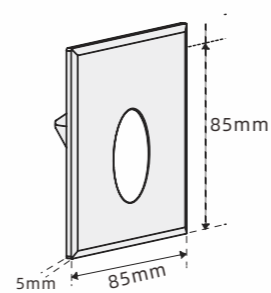

JP-9021

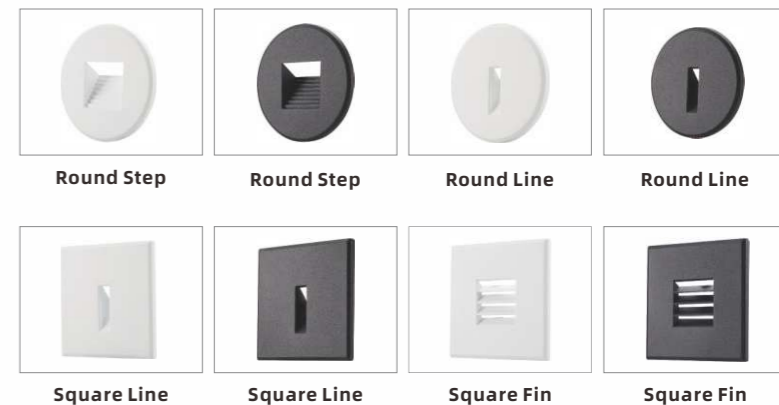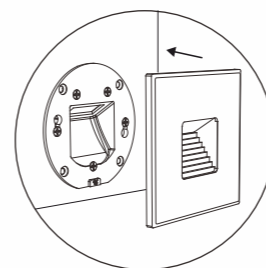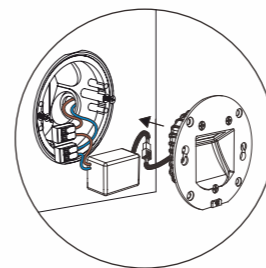


Art.no.	Description	Wattage	CCT	Lumens	B/A	Cutout
JP-9020	Gisela 2700K	3W	2700K	110lm	Asymmetrical	60mm
JP-9020CT	Gisela 2700/3000K	3W	2700/3000K	110/130lm	Asymmetrical	60mm



**LED Ceiling Light
MICROWAVE SENSOR**


TENOR

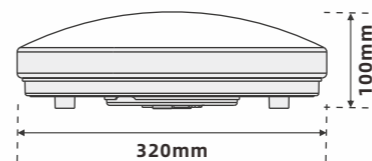

Microwave sensor:



(1) when presence detected

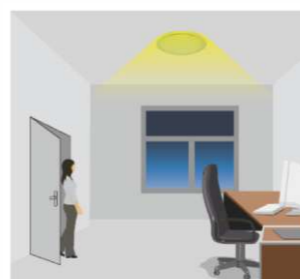

(2) Microwave induction



(3) People left, light dims



(4) Light switches off

MOON

adjustable luminous flux and color temperature

Ceiling light for both indoor and outdoor use. Selectable flux and color temperature via dip-switch.

- Robust IK10
- Enclosure class up to IP54


Adjustable flux | Adjustable luminous flux with 3 different current setting.

Changeable | LED and driver are toolless interchangeable.

Sensor | With or without microwave sensor



Ceiling box | Screw hole that fix over ceiling box



120°

CCT | Selectable CCT via DIP switch 3000K or 4000K.





Art.no.	Description	Wattage	CCT	Lumens	IP	Diameter
JP-2301	Tenor	10/14/20W	3000/4000K	1060/1460/2050lm	IP54/II	D320x100mm
JP-2302	Tenor Sensor	10/14/20W	3000/4000K	1060/1460/2050lm	IP54/II	D320x100mm




LED Panel Light SIDELIT

KVEQ

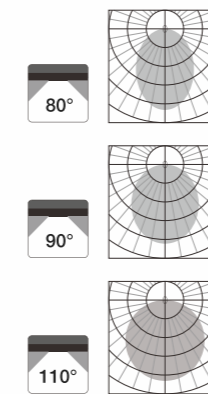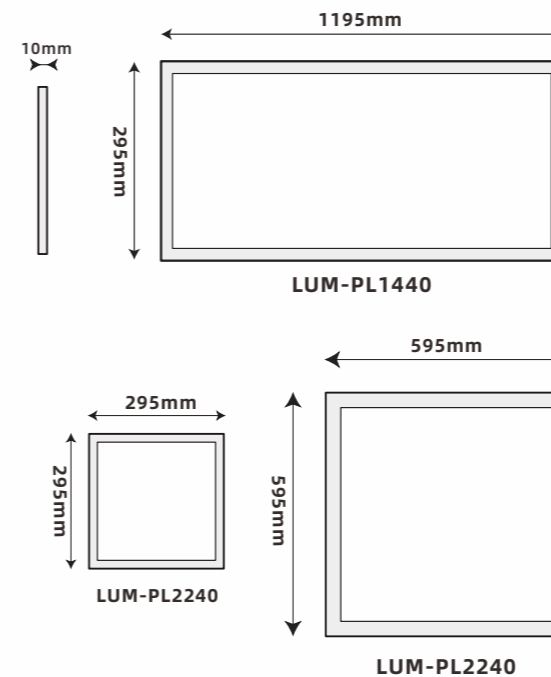


Compatible With


E.mergency
 **Em0403 LiFePO4 4W 3 hours**

Certification Mark	CE	IK10	IP44	
Test Regulation	CE-LVD	IK10	IP44	
Report Reference	201113049GZU	210319069GZU	201113049GZU	
Test Lab	intertek	intertek	intertek	
5 year Warranty	UV Resistant	IK10 Protection	IP44 Protection	Flame Resistant

- 2200K
- 2700K
- 3000K
- 3500K
- 4000K
- 6500K




Art.no.	Description	Wattage	CCT	Lumens	Dimming	Dimension
LUM-PL2240	Kveq Opal 6x6	20/30/40W	4000K	2780/3700/5150lm	On/off	595x595x10
LUM-PL2240D	Kveq Opal Dali 6x6	20/30/40W	4000K	2780/3700/5150lm	Dali 2	595x595x10
LUM-PL2240SR	Kveq Opal Sensor 6x6	30W	4000K	3650lm	Philips sensor	595x595x10

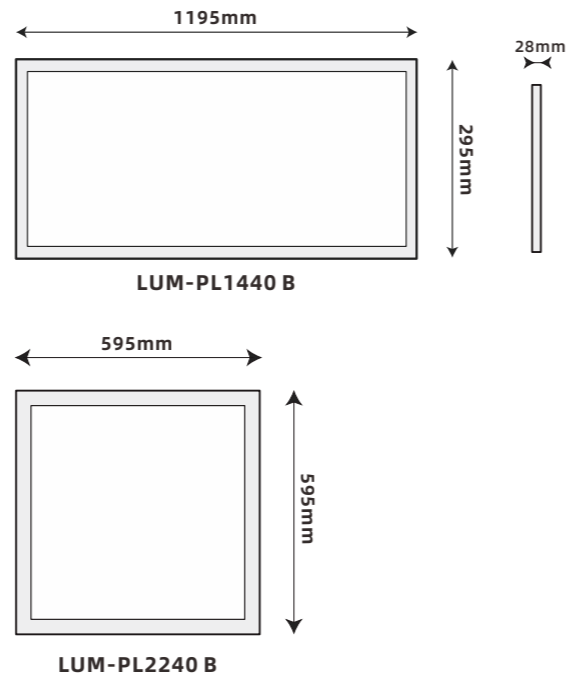

Certification Mark			
Test Regulation	CE-LVD	IK10	IP44
Report Reference	201113049GZU	210319069GZU	201113049GZU
Test Lab			




Art.no.	Description	Wattage	CCT	Lumens	Dimming
LUM-PL2230 BH	Kveq BL Opal 6x6	11/18/25W	3/4/5K	2000/3500/4300lm	DIM/DALI CLO
LUM-PL2230P BH	Kveq BL Prisma 6x6	11/18/25W	3/4/5K	1900/3300/4200lm	DIM/DALI CLO
LUM-PL1430 BH	Kveq BL Opal 3x12	11/18/25W	3/4/5K	2000/3500/4300lm	DIM/DALI CLO
LUM-PL1430 BH	Kveq BL Prisma 3x12	11/18/25W	3/4/5K	1900/3300/4200lm	DIM/DALI CLO
LUM-PL1215 BH	Kveq BL Opal 3x6	7/9/13W	3/4/5K	1150/1580/2100lm	DIM/DALI CLO
LUM-PL1215P BH	Kveq BL Prisma 3x6	7/9/13W	3/4/5K	1100/1500/2000lm	DIM/DALI CLO
LUM-PL2230P BHSR	Kveq BL Prisma 6x6 SR 24W		3/4K	3800/3900lm	Philips Sensor

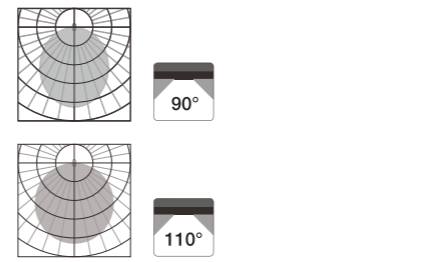

Compatible With

E.mergency

Em0403 LiFePO4 4W 3 hours

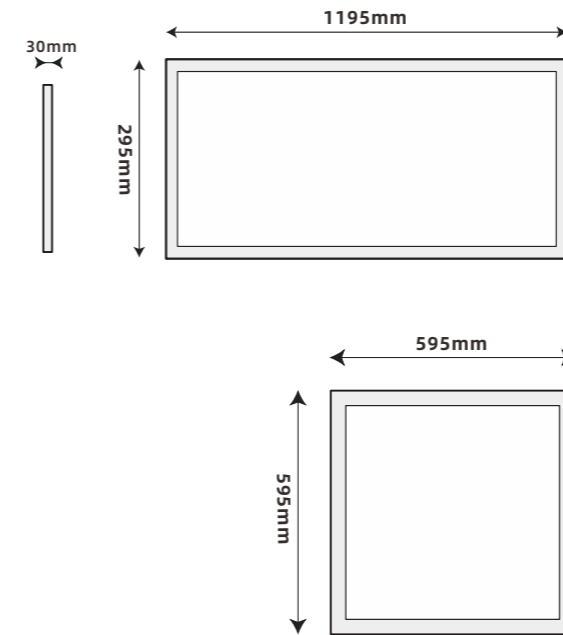

Certification Mark			
Test Regulation	CE-LVD	IK10	IP65
Report Reference	201113049GZU	210319069GZU	211221019GZU
Test Lab			



Art.no.	Description	Wattage	CCT	Lumens	Dimming
LUM-PL2230N BH	Kveq BL Nano 6x6	11/18/25W	3/4/5K	2000/3500/4300lm	DIM/DALI CLO
LUM-PL2230NIP BH	Kveq BL Nano 6x6 IP65	26W	3/4/5K	3500/3600/3650lm	ON&OFF/DALI
LUM-PL2230N BHDA	Kveq BL Nano 6x6 TW	11/18/25W	2700-6500K	4000/4500lm	DIM/DALI CLO
LUM-PL1430N BHDA	Kveq BL Nano 3x12 TW	11/18/25W	2700-6500K	4000/4500lm	DIM/DALI CLO





OUTDOOR




LED Spot Light
OUTDOOR & CONNECT

SPOT

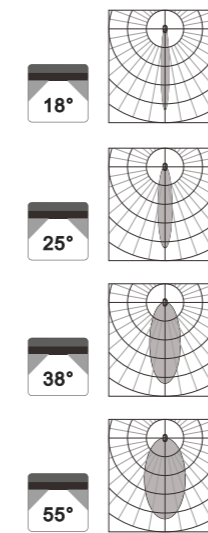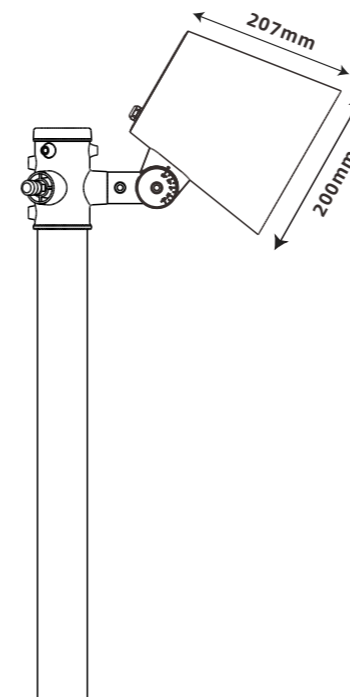

More installation options:

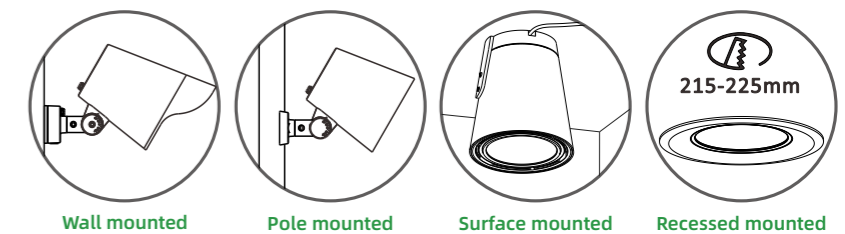


Art.no.	Description	Wattage	CCT	Lumens	Dimming
LUM-1310 930 UN	Creo Alu 930 18°	11/20/30W	3000K	1500/2400/3600lm	DIM/DALI CLO
LUM-1310 930 NR	Creo Alu 930 25°	11/20/30W	3000K	1500/2500/3800lm	DIM/DALI CLO
LUM-1310 930 MD	Creo Alu 930 38°	11/20/30W	3000K	1500/2500/3700lm	DIM/DALI CLO
LUM-1310 930 FD	Creo Alu 930 55°	11/20/30W	3000K	1550/2500/3800lm	DIM/DALI CLO
LUM-1310 940 UN	Creo Alu 940 18°	11/20/30W	4000K	1600/2650/3900lm	DIM/DALI CLO
LUM-1310 940 NR	Creo Alu 940 25°	11/20/30W	4000K	1600/2750/4050lm	DIM/DALI CLO
LUM-1310 940 MD	Creo Alu 940 38°	11/20/30W	4000K	1600/2700/4100lm	DIM/DALI CLO
LUM-1310 940 FD	Creo Alu 940 55°	11/20/30W	4000K	1650/2700/4100lm	DIM/DALI CLO




LED Garden Light
OUTDOOR & CONNECT


GARDEN

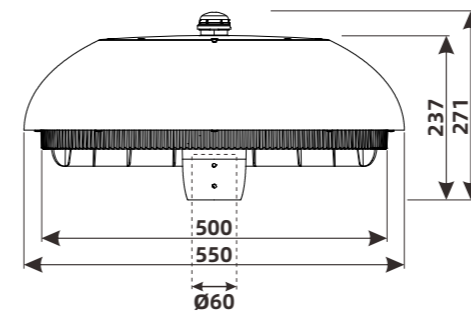

Anti-glare shielder options:



Partial shielder



Full shielder



5 year Warranty



UV Resistant



IK10 Protection



IP65 Protection



Flame Resistant



Zhaga D4i Socket



Art.no.	Description	Wattage	CCT	Lumens	Dimming
LUM-1401 DIP DIM	Atla Alu 830/840 DIM	26W	3000/4000K	3500/3650lm	DIM
LUM-1401 DIP DALI	Atla Alu 830/840 DALI	26W	3000/4000K	3500/3650lm	DALI D4i
LUM-1401 TW	Atla Alu TW DT8	26W	2200-4000K	3650lm	DALI DT8